

Temporary Horizontal Lifeline System: SpiderLine™ System

...takes the worry out of fall protection for ironworkers.




- Horizontally
- Vertically
- Around bends and corners
- Up/down inclines
- Fully customized

Features:

- Lightweight and portable
- Installs quickly
- Can be used on the perimeter of the building
- Two man tie-off up to 60 ft (18.3 m)
- Mounts at a 19° angle from the base, out of the way of workers walking steel
- 42 in. (1.1 m) cable height also serves as a handrail
- Attaches to beam with top mounted bolts and safety chain
- No drilling or welding
- No web straps to deteriorate
- No ratchets to break or threaded rods to lose
- No tie-back cables or loose pieces
- SpiderLine™ components stay together
- The SpiderLine™ system is tested and insured
- Free installation video upon request
- Enables you to concentrate on your job and maintain productivity
- Keeps your jobs profitable
- Meets OSHA requirements and ANSI standards

Part Number	Description
P-00015-1	60 ft (18.3 m) Complete Spiderline Assembly
P-00147-60	60 ft (18.3 m) Cable Assembly
P-00147-40	40 ft (12.2 m) Cable Assembly
P-00039-1	Energy Absorber
P-00041-1	Stanchion
P-00041-10	Concrete Stanchion

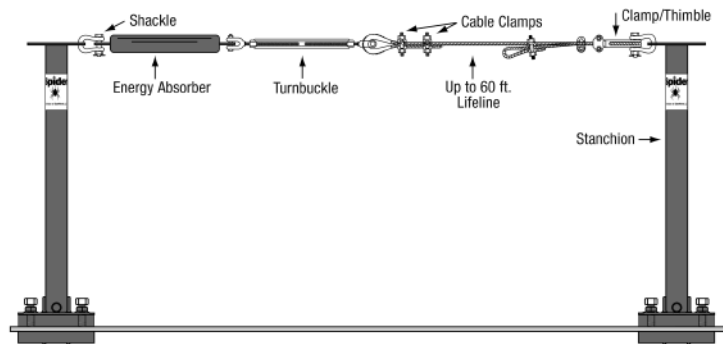

*Additional accessories available.
Call Spider for details.*

For more information, call: 1-877-774-3370