


Beams

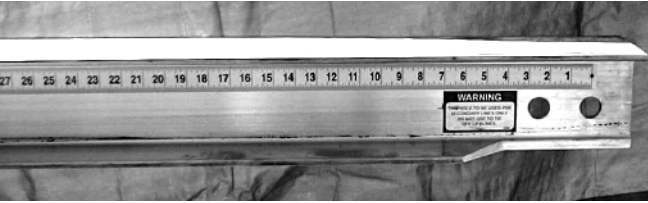


5 x 5 Outrigger Beam Key Features:

- 3 different configurations for overall length:
 - 16 ft (4.9 m), 22 ft (6.7 m) and 25 ft (7.6 m)
- The longest possible outreach available without extra parts
 - 74 in. (1,880 mm) when used with a 750 lb. (340.2 kg) hoist
 - 66 in. (1,676 mm) when used with a 1,000 lb. (453.6 kg) hoist
 - 54 in. (1,372 mm) when used with a 1,250 lb. (567 kg) hoist
 - 48 in. (1,219 mm) when used with a 1,500 lb. (680.4 kg) hoist
- No truss systems to lose, forget or learn how to set up
- No tools needed for assembly; uses the first splice tube assembly ever developed
- Safety labels insure proper set up
- Measuring tape label system determines outreach instantly
- Beams are designed to accept two wire ropes for secondary wire rope safety systems. This decreases the equipment needed for 4-line systems.
- Extensive product labeling makes set up goof-proof.
- Front and rear beams are identical, reducing the chance of loading the wrong parts on the truck.
- Counterweight chart label shows how many 50 lb. (22.7 kg) weights are required for your outreach: **No guesses, no math**
- Works with all Spider outrigger stands and most other stands
- Built by Spider in the USA

Optional accessories:

- Beams can be used with SA-10842 Adjustable Outrigger Stand
- Can also be used with outrigger towers, gantry frames and assorted rigging accessory products as shown on the following pages.

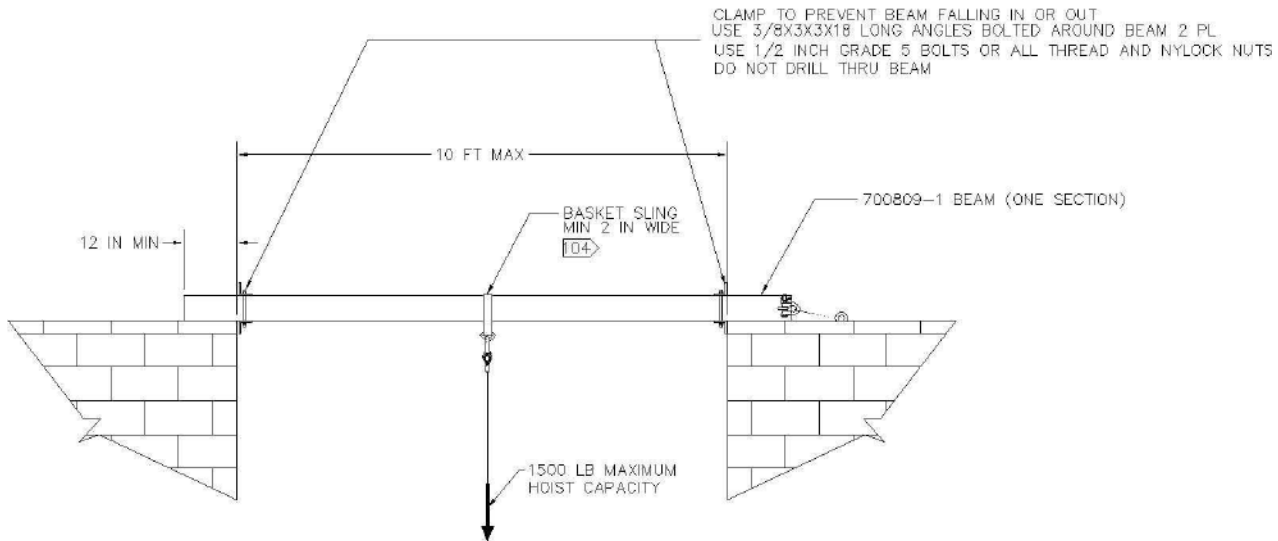

Portable Outrigger Beams

Part Number	Description	Total Length	Maximum Reach	For More Information
8-0217-6	5 x 5 Outrigger Beam	16 ft (4.9 m) [2 x 8 ft (2.4 m)] with splice tube	74 in. (1,880 mm) @ 750 lbs. (340.2 kg) 66 in. (1,676 mm) @ 1,000 lbs. (453.6 kg) 54 in. (1,372 mm) @ 1,250 lbs. (567 kg) 48 in. (1,219 mm) @ 1,500 lbs. (680.4 kg)	See page 112-113
8-0217-7	5 x 5 Outrigger Beam	22 ft (6.7 m) [2 x 8 ft (2.4 m) beams, plus 9 ft (2.7 m) splice tube]	74 in. (1,880 mm) @ 750 lbs. (340.2 kg) 66 in. (1,676 mm) @ 1,000 lbs. (453.6 kg) 54 in. (1,372 mm) @ 1,250 lbs. (567 kg) 48 in. (1,219 mm) @ 1,500 lbs. (680.4 kg)	See page 112-113
8-0217-5	5 x 5 Outrigger Beam	25 ft (7.6 m) [3 x 8 ft (2.4 m) beams, plus 2 x 3 ft (0.9 m) splice tubes]	74 in. (1,880 mm) @ 750 lbs. (340.2 kg) 66 in. (1,676 mm) @ 1,000 lbs. (453.6 kg) 54 in. (1,372 mm) @ 1,250 lbs. (567 kg) 48 in. (1,219 mm) @ 1,500 lbs. (680.4 kg)	See page 112-113
700809-1	6 in. (152 mm) Square Tube, 1/4 in. (6 mm) Wall Outrigger Beam	24 ft (7.3 m) [2 x 12 ft (3.7 m)]	84 in. (2,134 mm) @ 1,000 lbs. (453.6 kg) 72 in. (1,829 mm) @ 1,250 lbs. (567 kg) 60 in. (1,524 mm) @ 1,500 lbs. (680.4 kg)	See page 114
700819-1	6 in. (152 mm) Square Tube, 1/2 in. (13 mm) Wall Outrigger Beam	30 ft (9.1 m) [1 x 10 ft (3 m) and 1 x 20 ft (6.1 m)]	135 in. (3,429 mm) @ 1,000 lbs. (453.6 kg) 114 in. (2,896 mm) @ 1,250 lbs. (567 kg) 102 in. (2,591 mm) @ 1,500 lbs. (680.4 kg)	See page 115
700751-1*	6 x 4 Outrigger Beam	16 ft (4.9 m) [2 x 8 ft (2.4 m)] with splice tube	36 in. (914 mm) @ 1,000 lbs. (453.6 kg) 28 in. (711 mm) @ 1,250 lbs. (567 kg) 24 in. (610 mm) @ 1,500 lbs. (680.4 kg)	See page 116
SA-3728*	Aluminum Rolling Outrigger	22 ft (6.7 m) [3 x 8 ft (2.4 m)]	55 in. (1,397 mm) @ 1,000 lbs. (453.6 kg)	See page 117

*Available in rental fleet only

More information online at
www.spiderstaging.com

For more information, call: 1-877-774-3370